

QUADRA558LA


4-POST LIFT 5T, HIGH ACCURACY



As the QUADRA552LA, the QUADRA558LA also features a perfect finish. Hoses and wires from command unit to the runways, are routed into a plastic articulated chain providing also better reliability.

The QUADRA558LA, features longer runways than the QUADRA522LA, it allows working on vehicles with longer wheelbases.


The integrated auxiliary wheel-free offers adjustable lifting platforms - with front and rear extensions - to fit every vehicles.

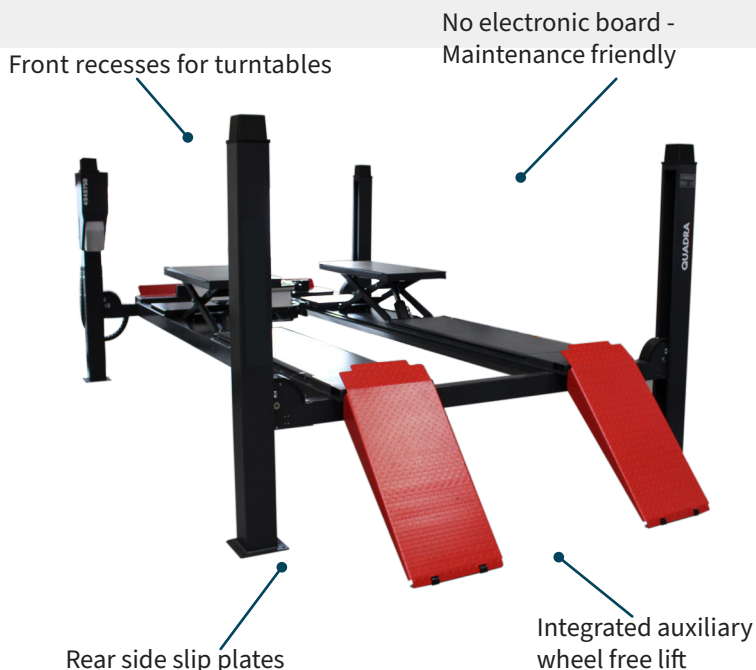


GENERAL SPECIFICATIONS	QUADRA558LA
Main lift capacity	5 000 kg
Auxiliary lift capacity	4 000 kg
Runways, length	5780 mm
Runways, width	630 mm
Overall length (on the ground)	6870 mm
Lifting/lowering time - lift loaded	60 sec. / 55 sec.
Lifting/lowering time - auxiliary lift	25 sec. / 20sec.
Max. lifting height - main lift	1850 mm
Max. lifting height - auxiliary lift	425 mm
Power supply - motor power	400 V / 3 ph / 50 Hz / 16 A / 2,2 kW
Max. Oil pressure	180 bars
Net weight	2400 kg

PACKAGING

Parcel Nr. 1 - 2343 kg

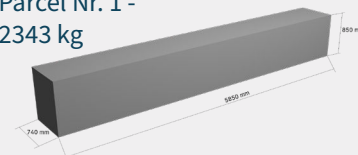

Parcel Nr. 2 - 96 kg

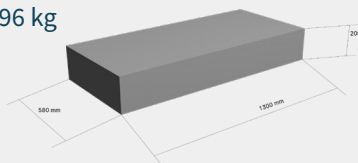

ACCESSORIES



See page 114

DIMENSIONS (IN MM)

