

# 44100-L-D31

HV SIDE SLIP TESTER WITHOUT RELEASE PLATE




# 44100-L-D32

HV SIDE SLIP TESTER WITH RELEASE PLATE

The side slip tester is managed by the test lane's cabinet. It allows the measure of the slip of the front and rear wheels. It makes a quick diagnosis of the vehicle's wheel alignment.

Thanks to its great length and its release plate, it gives precise and repetitive measures. The optical detection which is located at the front of the release plate make it more reliable since there is no mechanical contact.

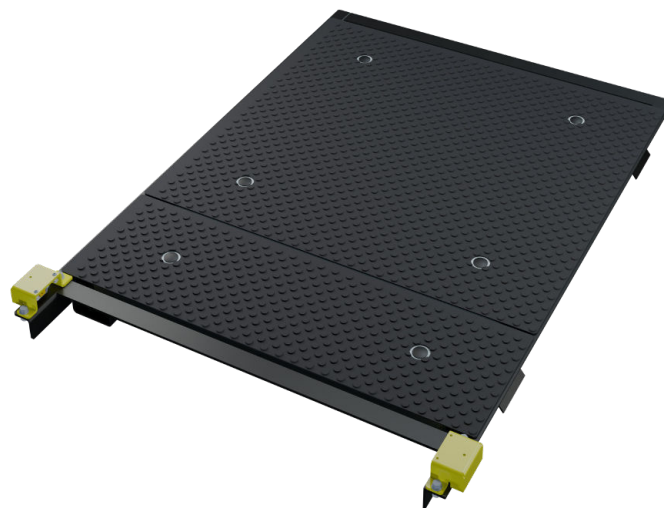


\*Optional release plate


TECHNICAL DATA	44100-L-D31	44100-L-D32
Release plate	without	with
Plates	1	2
Plate dimension (without rubber mat)	750 x 800 mm	750 x 1 050 mm
Rubber mat dimension	890 x 820 mm	890 x 1 090 mm
Thickness of side slip tester	36 mm	
Pit dimension	820 x 840 mm	820 x 1 115 mm
Depth	35 mm	
Measuring range	± 17 mm/m (±1 mm) or ± 20 m/km	
Load capacity (at the wheel)	6 500 kg	
Number of moving rollers	66	88
Connection	to the MODACQ of the brake tester	
Power supply	12 VDC	
Weight	61 kg	81 kg

## PACKAGING

Parcel 44100-L-31 - 90 kg



Parcel 44100-L-32 - 100 kg



## FRAMES



	With exit sensors	Without exit sensors
Ref. 44100-L-D31	Ref. AM123936	Ref. AM123937
Ref. 44100-L-D32	Ref. AM123936-D	Ref. AM123937-D